

SP300CE 履带式圆锥破碎站

CRAWLER CONE CRUSHING PLANT



产品特点 Product Advantage

- ◆ 智能、自动化电气控制系统，包含自我诊断、安全互锁、自动报警，保障设备安全可靠。
Intelligent electrical control system has various functions, including self-diagnosis, safety interlocking, automatic alarms, ensuring a safe and reliable machine.
- ◆ 給料位置无极调节，主机破碎效率和稳定性更有保证。
Stepless adjustment of feeding position ensures stable crushing efficiency and machine reliability.
- ◆ 集成变频系统，充分考虑防尘、散热、隔振、防水，电路系统万无一失。
Integrated variable frequency system has multiple functions, including dust-proof, cooling, shock isolation and water-proof, ensuring the safe of electrical system in all aspects.
- ◆ 智能多缸破碎主机，液压调节排料口、自动清腔、过载保护。
Intelligent crushing base machine with multiple crushing cylinders provide functions, such as hydraulic adjustable material outlet, automatic chamber cleaning and overload protection.
- ◆ 破碎主机配备独立液压、润滑模块，高效、节能。
Equipped with independent hydraulic and lubricating module, the crushing base machine works with high efficiency, meanwhile, saving energy.

SP300CE履带式圆锥破碎站

CRAWLER CONE CRUSHING PLANT




扫一扫视频获取更多资讯

项目 Item	名称 Description	参数 Parameter
整机 Overall Unit	工作总功率 Total Working Power	335 kW
	整机重量 Total Weight	61 t
	动力方式 Drive Mode	外接电源 Electric
	处理能力 Processing Capacity	210-430 t/h
	工作尺寸 Working Dimension (L×W×H)	19500×4000×4500 mm
喂料设备 Feeding Equipment	运输尺寸 Transportation Dimension (L×W×H)	20100×3600×3810 mm
	喂料高度 Feeding Height	3000 mm
	料斗容积 Hopper Capacity	6 m ³
破碎主机 Crusher	最大喂料尺寸 Max. Feeding Size	210 mm
	破碎机进料口尺寸(长×宽) Crusher Opening Size(L×W)	——
	排料口调节范围 Adjusting Range of Discharge Opening	22-51 mm
	破碎机重量 Crusher Weight	18.7 t
主输送皮带机 Main Conveyor	破碎机功率 Crusher Power	250 kW
	卸料高度 Discharge Height	3560 mm
	长×宽 Length×Width	12300×B1200 mm
振动筛箱○ Vibrating Screen Box	功率 Power	15 kW
	筛网层数 Number of Screen Layers	1 (2)
	筛体尺寸 Screen Size	4500×1500 mm
返料皮带机○ Magnetic Separator	功率 Power	3.7×2 kW
	卸料高度 Discharge Height	4966 mm
	长×宽 Length×Width	10150×B500 mm
成品皮带机(前)○ Product Conveyor (Front)	功率 Power	5.5 kW
	卸料高度 Discharge Height	3563 mm
	长×宽 Length×Width	7400×B1000 mm
行走系统 Travel System	功率 Power	11 kW
	发动机功率 Engine Power	103 kW
	行走控制方式 Travel Control Mode	液压 Hydraulic
除铁器 Magnetic Separator	最大爬坡角度 Max. Climbing Angle	20°
	长×宽 Length×Width	1000×B600 mm
	功率 Power	——
其他配置 Other Configurations	喷淋系统 Sprinkling System	照明系统 Lighting System
	集中润滑系统 Centralized Lubrication System	远程遥控系统 Remote Control System
	智能控制系统 Intelligent Control System	集成式变频器 Integrated frequency converter

*根据客户工况需求,带○标记为选配;该款设备在选择成品皮带机(前)时,筛网层数为2层。

*According to customer's working condition, ○ is optional; The deck of screen is 2 if the product conveyor(front) is selected on SP300CE

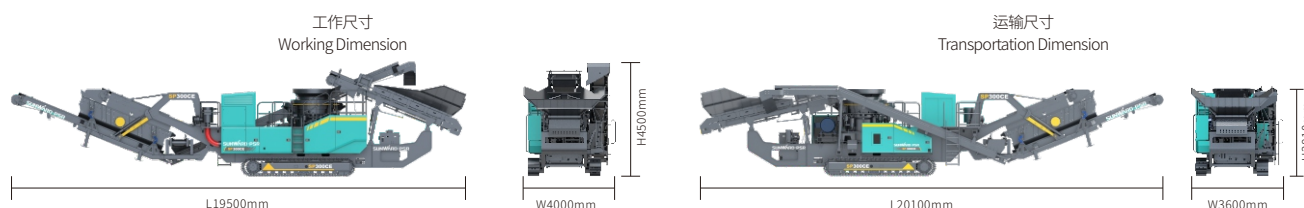

根据公司不断改进产品的方针,我们保留在未事先通知用户的情况下,改变参数和设计的权力,文中插图并不是设备的标准款式,山河普石勒保留最终解释权。
The parameters and design could be modified according to our upgrading plan. The illustration is not indicating the standard equipment. All rights reserved by Sunward·PSR.